

**GENERAL TIRE** 

**MS520**



GENERAL TIRE  
MEDIUM TRUCK

# MS520


## ALL-POSITION ON/OFF HIGHWAY SERVICE

23/32" tread depth and cut / chip resistant tread compound provides long tread life in on/off road conditions.

Stone ejection system reduces stone retention and casing penetrations.

Visual Alignment Indicators (VAI®) alert users to tire tracking problems.

New sidewall profile with curb rib reduces damage from curbing, cuts and abrasions.

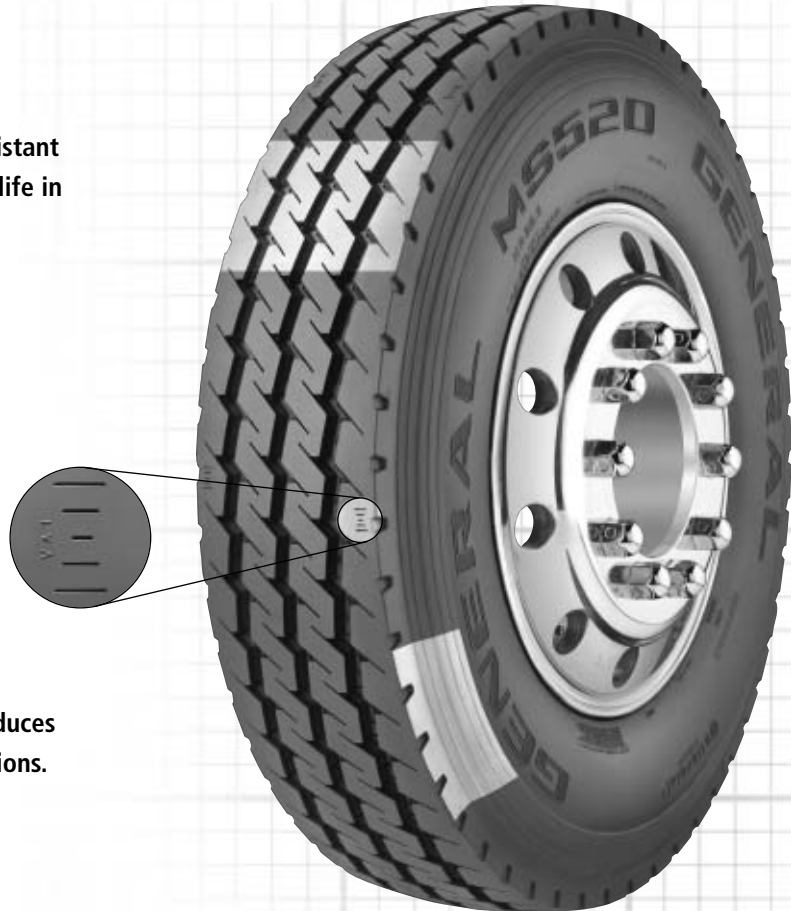

### Applications:

Coal haulers, logging, construction, school buses, waste haulers, any on/off highway service.

### TIRE SPECIFICATIONS Highway - 65 mph at loads indicated unless otherwise stated.

TIRE SIZE	LOAD RANGE	TREAD DEPTH	PRODUCT CODE	SAP ARTICLE NUMBER	RIM WIDTH IN	OVERALL INFLATED DIAMETER IN (mm)	OVERALL INFLATED WIDTH IN (mm)	LOADED SECTION WIDTH IN (mm)	STATIC LOADED RADIUS IN (mm)	MINIMUM DUAL SPACING IN (mm)	REVS PER MILE (KM)	TIRE WEIGHT LB (KG)	MAX LOAD@INFLATION				
													Single lbs (KG)	Single psi (KPa)	Dual lbs (KG)	Dual psi (KPa)	
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS																	
11R22.5	H	23/32	0169193	05681140000	8.25	41.9 (1062)	11.1 (282)	12.2 (310)	19.6 (497)	12.5 (318)	494 (308)	124 (56)	6610 (3000)	120 (830)	6005 (2725)	120 (830)	
11R24.5	H	23/32	0169194	05681160000	8.25	43.8 (1113)	11.1 (282)	12.2 (310)	20.6 (523)	12.5 (318)	473 (294)	132 (60)	7160 (3250)	120 (830)	6610 (3000)	120 (830)	

Note: Minimum Dual Spacing calculated without chains.  
These specifications subject to change without notice.